
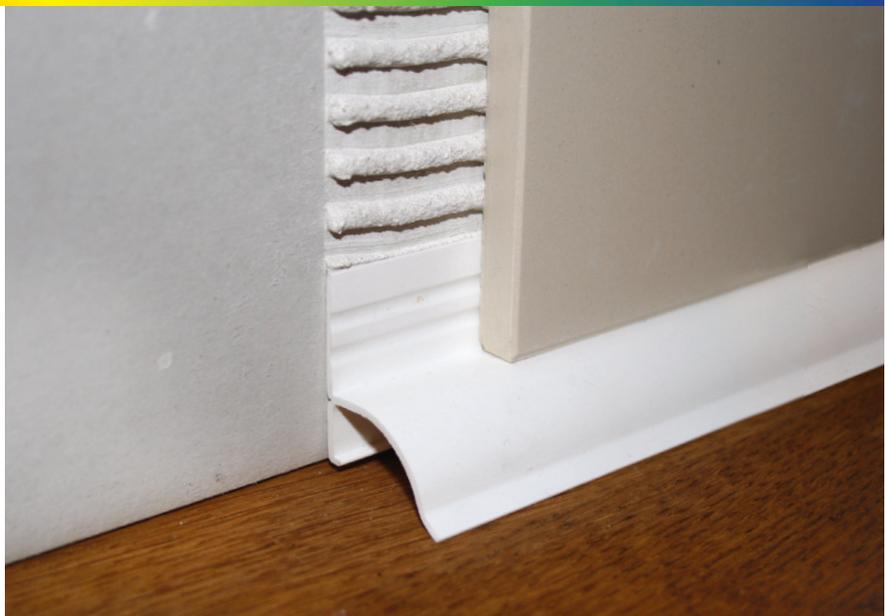


SBS/SPS

Product Datasheet 8.18



P.V.C Seal Under / Over Tile

01 White



Product Description

Genesis P.V.C. Seal Under / Over Tile SBS and SPS are coextruded bath seals, designed to create an attractive seal around the perimeter of the bath or shower.

The SBS profile can be fitted after the tiles have been fixed or during tiling with the tile fixed over the specially designed flat top step of the profile.

The SPS profile is designed to fit during tiling with the tile fixed over the specially designed flat top step of the profile.

Dimensions

SBS/SPS profiles are only available in 2.5m lengths.

Maintenance

Genesis SBS and SPS profiles require no special maintenance they should be cleaned periodically using a neutral detergent to maintain the appearance.

Regular cleaning aids the longevity of the profile.

Installation


1. Cut to length allowing mitres for corners, although mitre cutting can be avoided by using the Tile Seal mitre Piece and End Caps.
2. Pre-weight bath or shower tray by standing in whilst fixing.
3. Before fitting the last row of ceramic tiles, tack seal into the internal angle, simultaneously bedding the leg into the adhesive. Ensure the leg rests on the base confirming the seal is fully compressed.
4. Fix last row of tiles, bringing tile to rest on the Tile Seal. Grout according to manufacturers instructions.

Technical Details

Property	Test Method	Result
Vicat Softening Point	ISO 306	93°C
Tensile Modulus	ASTM D638	1.19 GPa
Yield Stress	ASTM D638	44.8 MPa
Yield Strain	ASTM D638	4.42%
Elongation at Failure	ASTM D638	131%
Flexural Modulus	ISO 178	2.38 GPa
Tensile Impact Strength	ISO 8256	413 kJ/m ²

Allied Products

Specially designed corner pieces and end caps (SMT100) prevent unsightly mitre cuts and end caps ensure a neat professional finish to the installation

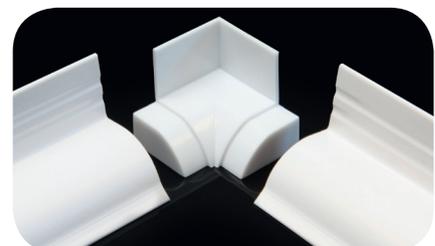

+44 (0)1642 713000 info@genesis-gs.com
www.genesis-gs.com

 **Genesis**
For the Perfect Finish